

## High performance double sided white acrylic foam tape

A very strong closed cell acrylic foam, coated on both sides with a very high performance crosslinked acrylic adhesive, and protected by a production aid film liner.

### Benefits

- Good tack, adhesion and dynamic strength.
- Good gap-filling between slightly uneven materials.
- High shear strength, even at high temperatures.
- Excellent resistance to water, solvents and plasticizers.
- Excellent resistance to UV light and outdoor ageing.
- Good Adhesion to metals, glass, PVC and most paints.
- Available with our production aid film liner.

### Limitations

Techniflex white requires smooth clean surfaces, warmth and firm pressure for best results, and full bond strength may take several hours to develop. It will not bond well to low surface energy materials.

### Double sided tapes offer the following production advantages:

- Clean and simple to use.
- Quick and efficient application.
- Consistent adhesive coating thickness.
- Consistent adhesion performance.
- Instant adhesion.
- No hazardous fumes.
- No drying or curing times.
- Ready for the next part of the application process.
- No contamination of other surfaces.

Technibond offers this product in any width roll, converted to exact tolerance and dispatched within a few days.

Pads, diecut gaskets, sheets and special laminations also available.


### Warranty

Our technical advice is offered in good faith but without warranty. The user is responsible for testing under their own conditions of use assuring themselves that it is suitable for their particular purpose. The technical data was obtained under specific laboratory test conditions, and should not be used for specification purposes without prior consultation with us.


### Technical Data

Thickness 2.0 mm  
Density 720 Kg/M<sup>3</sup>

#### 180° Peel Adhesion Results to Steel

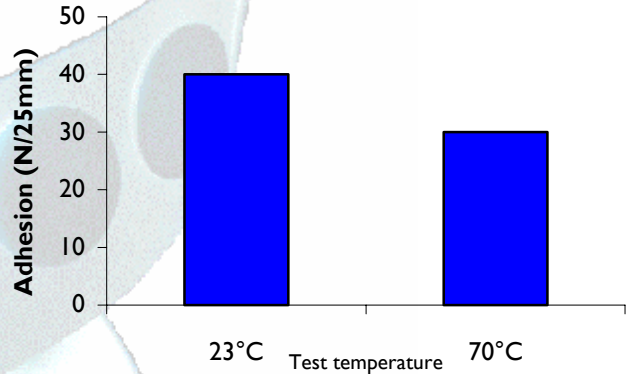

#### Static Shear (AFERA) Results to Steel

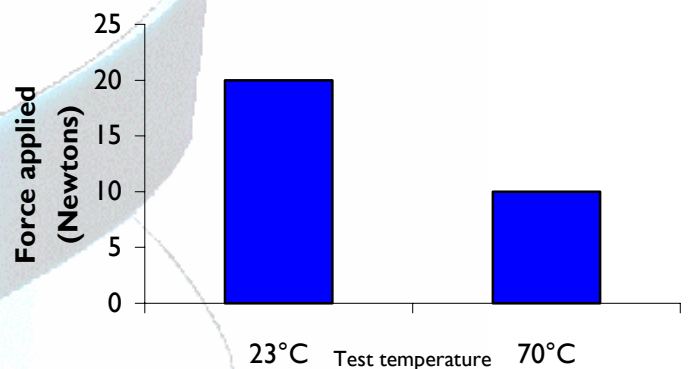

### Temperature Range



Min. Application Temperature = +10 °C

06/12/2006

Product Availability	<b>Product variations</b> Techniflex White	<b>Thickness</b> 2mm	<b>Colour</b> White
	<b>Width</b> 6mm - 450mm	<b>Release liner</b> Production aid film	
	<b>Delivery</b> Please contact the sales office for availability. Pads and diecuts also available		