

### High tack double sided polyethylene foam tape

A strong 1mm thick white polyethylene foam carrier coated on both sides with a heavy mass of a high tack, crosslinked modified acrylic adhesive. Resulting in a very aggressive high tack foam tape.

#### Benefits

- Extremely high tack bonds immediately to almost all materials.
- Good adhesion to rough and low energy surfaces.
- Good gap-filling on uneven mouldings and extrusions.
- Exceptionally high strength foam carrier.
- Good shear, even at high temperatures.
- Good resistance to solvents and plasticizers.
- Excellent ageing and UV resistance.
- Available with our production aid film liner.

#### Limitations

Few. HTA is not recommended for applications where a high shear performance is required.

#### Double sided tapes offer the following production advantages:

- Clean and simple to use.
- Quick and efficient application.
- Consistent adhesive coating thickness.
- Consistent adhesion performance.
- Instant adhesion.
- No hazardous fumes.
- No drying or curing times.
- Ready for the next part of the application process.
- No contamination of other surfaces.

Technibond offers this product in any width roll, converted to exact tolerance and dispatched within a few days.

Bobbins, pads, diecut gaskets, sheets and special laminations also available.


#### Warranty

Our technical advice is offered in good faith but without warranty. The user is responsible for testing under their own conditions of use assuring themselves that it is suitable for their particular purpose. The technical data was obtained under specific laboratory test conditions, and should not be used for specification purposes without prior consultation with us.


#### Technical Data

Thickness 1.0 mm

#### 180° Peel Adhesion Results to Steel

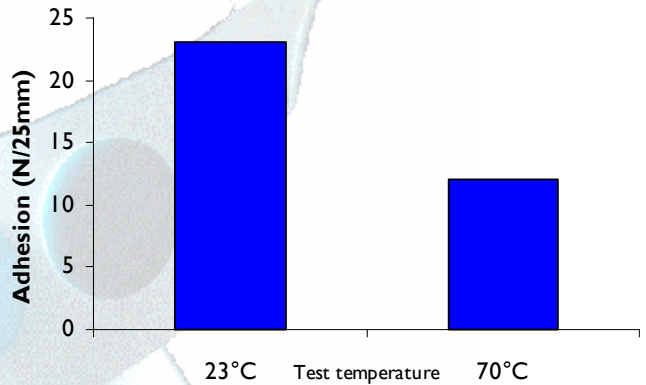

#### Static Shear (AFERA) Results to Steel

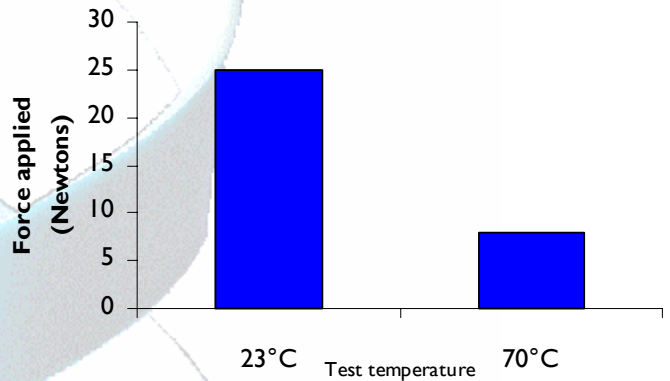

#### Temperature Range



Min. Application Temperature = +5 °C

27/05/2005

Product Availability	<b>Product variations</b> HTA & HTAF	<b>Thickness</b> 1mm	<b>Colour</b> White
	<b>Width</b> 6mm - 1200mm	<b>Release liner</b> Paper or production aid film	
	<b>Delivery</b> All rolls cut to order and supplied within a few days. Bobbins, pads and diecuts also available		