

# T555 Data Sheet

High Performance Double Sided  
Tissue Tape

## Description

A thin tissue carrier coated on both sides with a high performance, crosslinked modified acrylic adhesive. Providing an excellent combination of very high adhesion and shear performance.

## Benefits

- Exceptional combination of performance and price.
- High tack adhesive bonds to a wide range of smooth and slightly rough surfaces.
- Very high adhesion to glass, metals, paints and most plastics.
- Very high shear and high temperature performance.
- Good resistance to solvents and plasticizers.
- Good resistance to UV light and weathering.
- Suitable for most general and high performance applications.
- Available with our production aid film release liner.

## Technical Data

Thickness 0.13 mm

## Temperature Range




Minimum application temperature: +10°C


## Production Advantages

- Clean and simple to use
- Quick and efficient application
- Consistent adhesive coating thickness
- Consistent adhesion performance
- Instant adhesion
- No hazardous fumes
- No drying or curing times
- Ready for the next part of application process
- No contamination of other surfaces.

### 180° Peel Adhesion Results To Steel

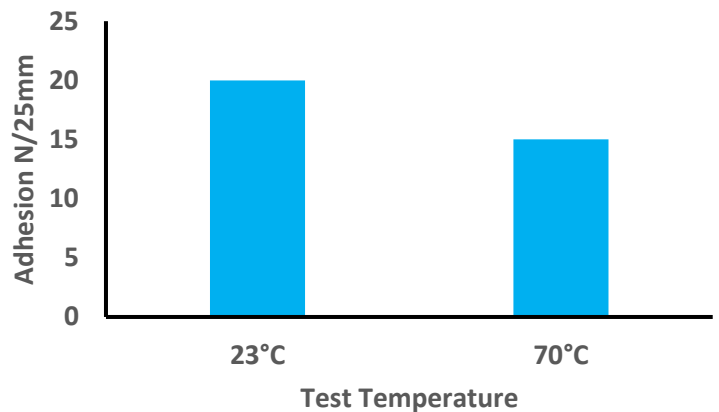


### Static Shear (AFERA) Results To Steel

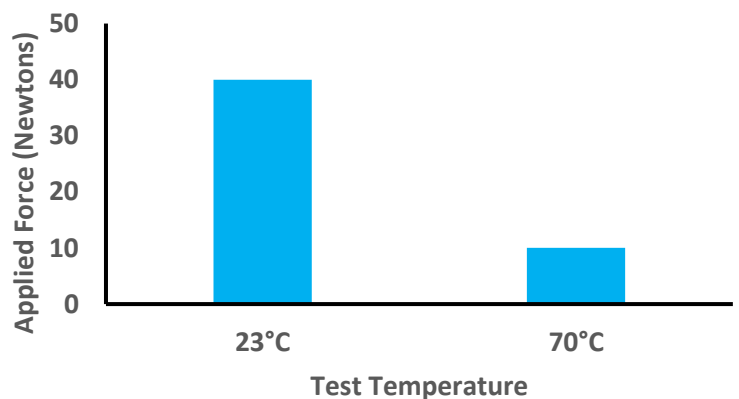

# T555 Data Sheet

High Performance Double Sided  
Tissue Tape

## Typical Surface Adhesion Values

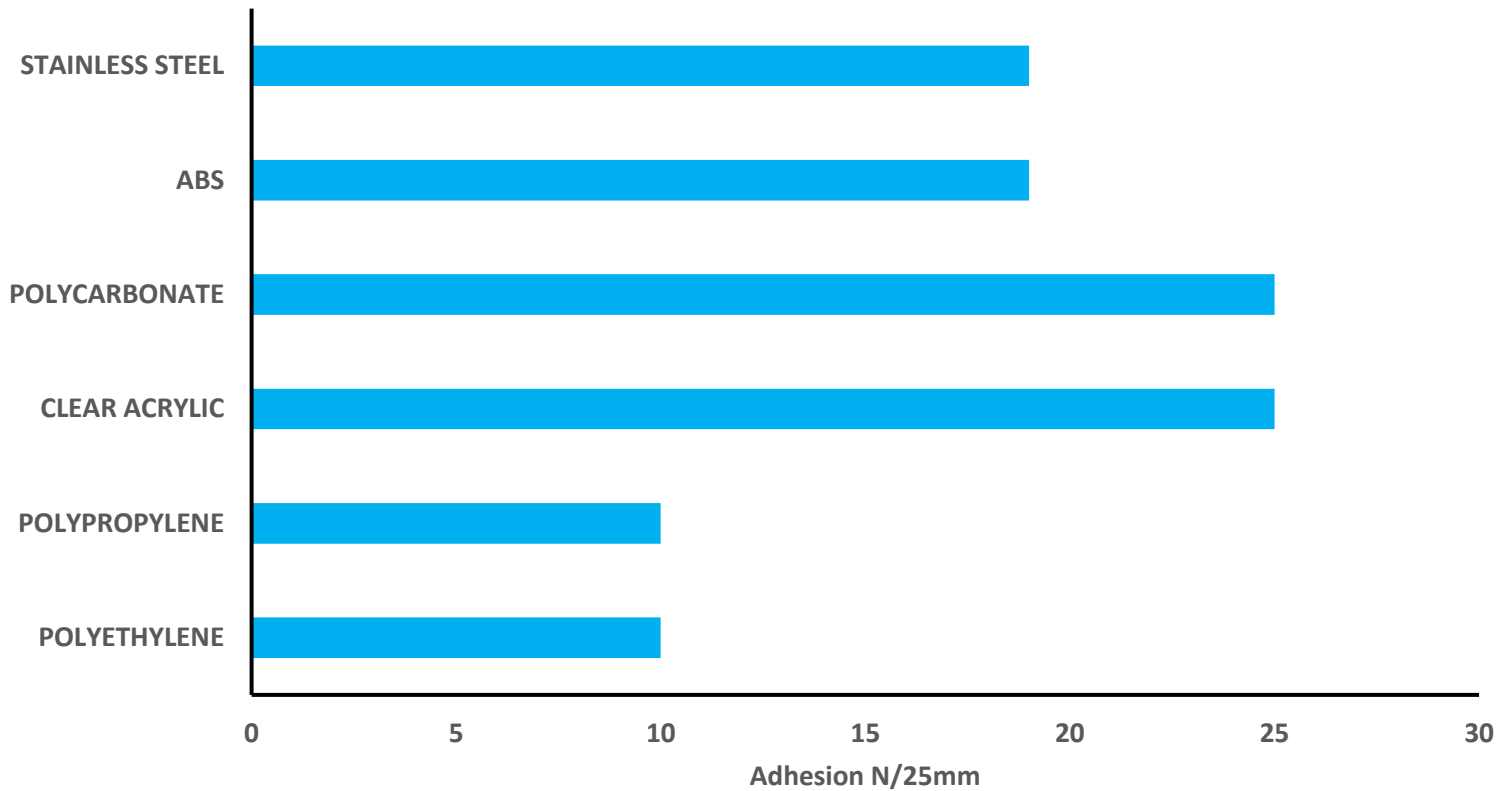

## Product Availability

<b>Product Variations</b>	Pads, Diecut Gaskets, Sheets and Special Laminations.
<b>Colour</b>	White Tissue
<b>Width</b>	6mm - 1250mm
<b>Release Liner</b>	Production aid film or Paper
<b>Delivery</b>	All rolls cut to order supplied within a few days

## Limitations

Few. T 555 can be used in most situations, but performance may be limited on very low surface energy plastics such as polyethylene and polypropylene; and on very rough materials.

## Warranty

Our technical advice is offered in good faith but without warranty. The user is responsible for testing under their own conditions of use assuring themselves that it is suitable for their particular purpose. The technical data was obtained under specific laboratory test conditions, and should not be used for specification purposes without prior consultation with us.