

T567 Data Sheet

High Performance Double Sided
Polypropylene film tape

Description

A thin colourless polypropylene carrier coated on both sides with a heavy mass of a transparent, cross linked modified acrylic adhesive. Providing an excellent combination of very high adhesion and good shear performance.

General Benefits

- High adhesion to most metals, rubbers, plastics.
- Good performance at high temperatures.
- Good resistance to solvents and plasticisers.
- Good resistance to UV light and weathering.
- Provides a transparent bond

Technical Data

Thickness 0.22 mm.

Temperature Range




Minimum application temperature: +5°C.


Production Advantages

- Clean and simple to use.
- Quick and efficient application.
- Consistent adhesive coating thickness.
- Consistent adhesion performance.
- Instant adhesion.
- No hazardous fumes.
- No drying or curing times.
- Ready for the next part of application process.
- No contamination of other surfaces.

180° Peel Adhesion Results To Steel

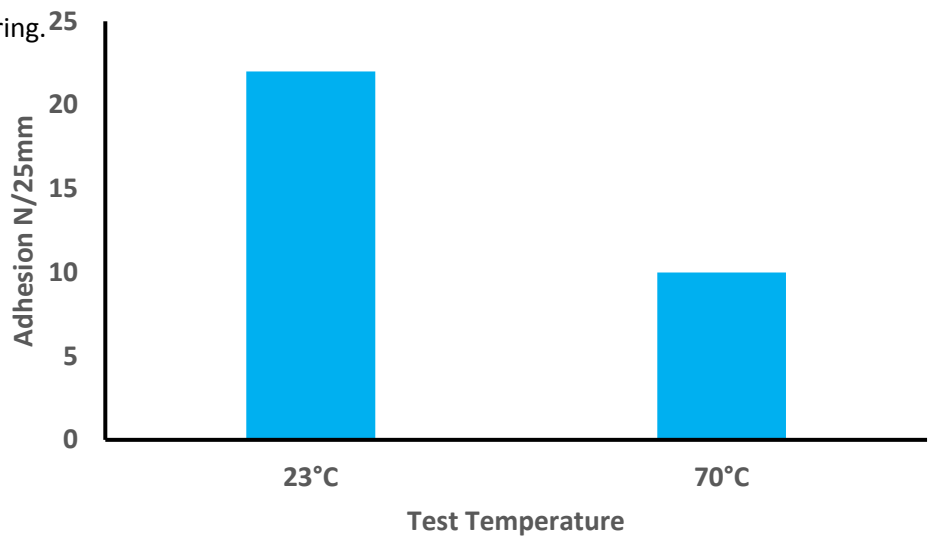


Static Shear (AFERA) Results To Steel

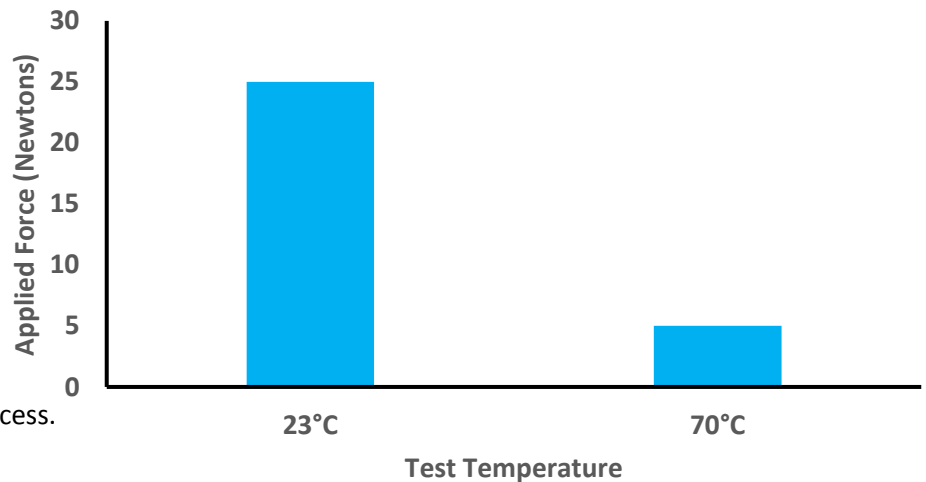

T567 Data Sheet

High Performance Double Sided
Polypropylene film tape

Typical Surface Adhesion Values

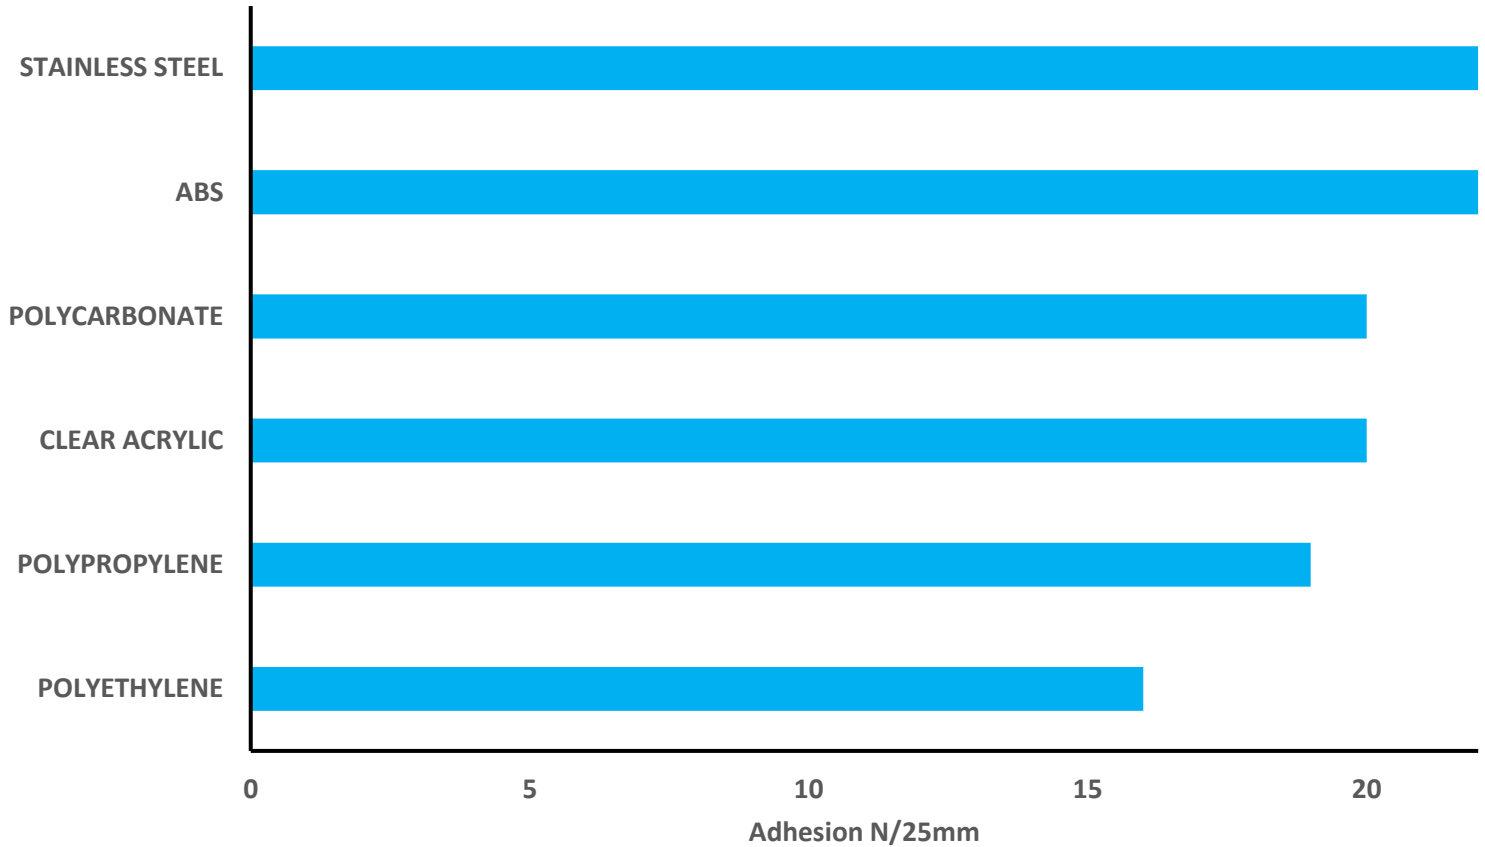

Product Availability

Product Variations	Pads, Diecuts, Bobbins, Sheets.
Colour	Colourless
Width	6mm - 1372mm.
Release Liner	Paper or production aid film.
Delivery	All rolls cut to order supplied within a few days (Subject to availability).

Limitations

Very few. May have limited performance on some very low surface energy plastics.

Warranty

Our technical advice is offered in good faith but without warranty. The user is responsible for testing under their own conditions of use assuring themselves that it is suitable for their particular purpose. The technical data was obtained under specific laboratory test conditions, and should not be used for specification purposes without prior consultation with us.